



SAFWAY SERVICES, LLC
 8006 EAST SLIGH AVENUE
 TAMPA, FL 33610
 Phone: (813) 623-6228
 Fax: (813) 623-6866

Customer: **KHORS CONSTRUCTION**
 ATTN: Khori Khorsandian
 12222 ANNE KENIA DR
 THONOTOSASSA, FL 33592
 Contact Phone: (813) 728-3689
 Contact Fax:

Jobsite: **PIER 60 BAIT SHOP**
 CLEAR WATER, FL 33767
 Contact: KORI KHORSANDIAN
 Phone: (813) 728-3689

Quotation No: 18650	Quote Date: 10/20/17	Opportunity #466582	Sales Rep: Steven Church
---------------------	----------------------	---------------------	--------------------------

Broken out as:

Scaffolding

Total Bid Rental	\$3,563.34	Equipment Weight: 25,571.80 Lbs.
Hard Costs:	\$670.00	
Erect Labor:	\$6,000.00	
Dismantle Labor:	\$4,800.00	
Total Labor	\$10,800.00	
Freight:	\$800.00	
Scaffolding Total	\$15,833.34	* Taxes Not Included

Total:

Quotation Sub-Total:	\$15,833.34	
Tax Amount:	\$0.00	
Grand Total:	\$15,833.34	* Taxes Not Included

Scaffolding - Description of Work

This is proposal #18650 for equipment rental, erect, dismantle and deliver/pickup.

This proposal includes 28 days' rental and will be \$127.25 per day thereafter.

Safway Services, LLC is to erect and dismantle: Systems scaffold that will be on all sides of structure on Pier 60 Clearwater. Scaffold will reach approx 11" high to give access to all siding. Scaffold will need to be erected and cantilever out from deck walk ways over water to provide access to entire facade of the structure. Scaffold will be 49' long on North and South side. Scaffold will be 32' long on East and West side. Safway will require access to structure by way of truck that will drive directly onto the pier. Safway will provide and install mesh netting to catch debris from falling into water below. Safway not responsible for debris that is not caught by netting that may fall below. Safway will have to tie into structure to secure scaffold. Customer responsible to fix all tie in repairs. Customer responsible to block construction area from pedestrian traffic. Safway is not including pedestrian over head protection. Toe boards are not included.

All measurements are approximate. Safway is to have 25ft. truck access to all work areas. Safway is to mobilize once for erection and once for dismantle. Equipment is to be erected on a flat level surface with no obstacles in the way. CUSTOMER is responsible for ensuring Safway workers have unobstructed access to work areas. CUSTOMER is responsible for repairing scaffold tie-off points, obtaining all permits, closing lanes, controlling traffic, and placing signage. CUSTOMER is to ensure that all surfaces where scaffolding is to be erected are capable of withstanding imposed loads. Safway is to erect scaffold on wood sills or metal joists; CUSTOMER is to provide any further desired protection of surfaces on which equipment is erected and of all access ways and egress ways. Safway will not be responsible for damage to those surfaces or areas. All work shall be performed during normal, straight-time working hours (7:00 am to 3:30 pm Monday through Friday). If Safway will be required to sign a Sub-Contract agreement, Safway reserves the right to review, negotiate and agree to all terms and conditions prior to commencing work. If a site-specific insurance certificate is required, 2-3 day will be required from the execution of the contract. Exclusions: standby time, overtime, prevailing wage, side-brackets, re-shoring, retention and taxes.

CUSTOMER is to barricade and block access to all areas to which objects may fall from scaffolding.

Additional work beyond this scope, and standby time, will be billed at the following T&M rates (4 hr. min. per man): Straight time/Overtime/Double-time rates are \$40/\$55/\$70 per hour, per man. Standard Safway rental rates will apply for additional equipment rental. Safway trucking: Standard charges will apply depending on location. Third party freight or hard costs: cost + 10%. Safway payment terms are Net 30. This quote is valid for 30 days.



October 20, 2017

PROPOSAL SUBMITTED TO:

Khors Construction, Inc.
12222 Anne Kenia Drive
Thonotosassa, FL 33592
khorsconst@gmail.com, (813) 728-3689

JOB NAME/LOCATION:

Pier 60 Reroof
Clearwater, Florida

Metal Panel and Fascia

1. Remove existing metal roof to roof deck.
2. Replace damage plywood with like material.
3. Furnish & Install new Aluminum Metal Roof System including Fascia.
4. 20 Year GAF NDL System Warranty (Labor and Material Warranty)
5. Permit, dump fees, workers' compensation insurance and general liability insurance and taxes included in total price.

All materials are guaranteed to be as specified and the work to be performed in accordance with all state and local codes in a substantial workmanlike manner for the sum of: \$108, 265.00

Respectfully submitted,

AKVM Construction Group Inc.

Acceptance: As signed below the above proposed prices and specifications are satisfactory and hereby accepted. I have read and understand the "Terms and Conditions" included in this proposal. I understand that these "Terms and Conditions" are a part of this contract. You are authorized to complete this work as specified. Payment will be made as indicated above. All sums not paid when due shall earn interest at the rate of 1% per month until paid and contractor shall be entitled to recover all costs of collection, including attorney's fees, if contractor is not paid.

By: _____ **Date:** _____

Return of Signed Document not required-Email Authorization is Acceptable

ALLIED ROOFING, INC.

P.O. BOX 15238

TAMPA, FL 33684

813-875-2727 Fax: 875-1335

License # CCC042851

October 16, 2017

Khorsconst@gmail.com

LOCATION OF JOB: The Pier
Clearwater Beach

STRUCTURE: Reroofing 7 Structures

OWNER: City of Clearwater

PROPOSAL #1710-267

Scope:

Remove/replace existing P.T. 2 x 12 fascia and wrap with .032 Kynar standard color aluminum

Remove/dispose of existing roofing down to wood decks

Inspect/replace any defective deck on unit price basis

Install 1-layer self-adhered membrane roof underlayment

Install Gulf Coast 12" O.C. .032 Kynar standard color aluminum standing seam roofing/trim
with 25 year paint finish and 20 year watertightness warranty

Bid Proposal: \$128,270.00

Unit Prices:

\$2.80 per board foot P.T. decking

\$3.00 per square foot 5/8" P.T. plywood deck

**RESPECTFULLY SUBMITTED
ALLIED ROOFING INC.**

**Eugene R. Meckley
Vice President**

From: TERRANCE BRADFORD terrance@pro-fitdevelopment.com
Subject: Re: I've shared 'Pier 60 Roofing' with you on Box
Date: October 22, 2017 at 10:01 PM
To: Kori Khorsandian khorsconst@gmail.com



Good evening Kori how are you I reviewed the drawings and specs over the weekend, our roofing proposal turn key would be \$137,456.78 mat/lab to do this job in Clearwater per the plans & specifications

Terrance L. Bradford
4007 N. Taliaferro Ave. Suite D
Tampa, FL 33603
Tampa Office: 813.514.8783, Ext. 1
Tampa Fax : 813.231.8866



"Please consider the environment before printing this e-mail"

On Oct 16, 2017, at 9:17 AM, Kori Khorsandian <khorsconst@gmail.com> wrote:

<https://app.box.com/s/onczigoycgzpykxcp6h6h48ipcmbw>

Kori Khorsandian
Khors Construction, Inc.
(813) 728-3689

Sent from my iphone.



PO BOX 273890
Tampa, FL 33688-3890

Date
10/11/2017

Office: 813-935-5868
Cell: 813-391-8915
Fax: 813-932-6150
jarrod@ppgtampa.com

PROPOSAL

To:	Khors Construction
------------	--------------------

Project:	Exterior Painting: Pier 60- Metal Brackets & Support Steel Clearwater Beach, FL
-----------------	---

Attn	Kori Khorsandian 813-220-2827
-------------	----------------------------------

Email:	khorsconst@gmail.com
---------------	--

PPG, Inc proposes to furnish labor, materials, supervision, and insurance for the following:

Item #		
	<p>Exterior Painting: Scope of work is limited to metal brackets and support members at (5) locations of Pavilion/ Covered Structures at Pier 60 only.</p> <p>Hand-tool clean, grind to remove loose rust scale. Spot prime bare metal with Amercoat 1 component Epoxy Apply 1 full coat of Amercoat Epoxy Apply 2 top coats of Durethane DTM Urethane Mastic</p>	
Total:		\$ 12,000.00

Notes
All work to be performed during normal business hours.

Exclusions:
Excludes- Sandblasting, Wood refinishing, Hardie Siding, and deck coatings.



**GULF COAST
PAINTING**

PROPOSAL

To: Kori Khorsandian

1518 Rowland Dr
 Odessa, FL 33556

727-514-8988 Cell
 813-925-9616 Office

gcpainting1@tampabay.rr.com - Eric
gcpainting2@tampabay.rr.com - Daniel

Attn: Kori	
Date: 10/20/17	Page 1 of 1
From: Eric Wade p-17177	
Re: Pier 60 Structural connectors	

Phone: 813-728-3689

E-mail: khorsconst@gmail.com

We propose to furnish all labor, materials, equipment, supervision, and insurance for the following:

We will clean, prime, and paint all structural steel bolt and connectors above the slab of the walkway (we are doing nothing underneath the pier). The rust will be either hand scraped with flat blades and wire brushes or in a few instances a 4" side grinder and a wire brush attachment, primes with Porter's Amerlock 2 (a 2 part epoxy designed to lock in rust), and top coated with 1 coat of Porter's Durathane.

We include 8' high plywood barricades necessary to perform our work - per note in upper right hand corner of sheet A1.1. We include work on all 6 pavillions and some on the baithouse brackets/fasteners. This will be a 2 man operation and will take 6 weeks to complete. It is understood 1 parking space will be provided for us the duration of the project.

We do not include painting anything other than the steel connectors and nuts and bolts.

Total: \$38,500.00

From: Kori Khorsandian khorsconst@gmail.com
Subject: Fwd: I've shared '100% OWNER REVIEW.PDF' with you on Box
Date: October 20, 2017 at 11:28 AM
To:



Begin forwarded message:

From: Jack Croscup <ccstwindsgroup@hotmail.com>
Subject: Re: I've shared '100% OWNER REVIEW.PDF' with you on Box
Date: October 11, 2017 at 5:10:33 PM EDT
To: Kori Khorsandian <khorsconst@gmail.com>

Demo and frame labor for project \$29,375.00 Add \$2,856.00 if you want us to do the Fascia 2x12's included. Pier 60 material. Gables total 640 sq ft. I bumped it a little on all of the takeoffs. siding-980 sq ft. 760 sq ft of ceiling. 186 lin ft of 24in vented soffit. you might want to check my math.
Thanks, Jack SPC

From: Kori Khorsandian <khorsconst@gmail.com>
Sent: Wednesday, September 27, 2017 5:46:43 PM
To: Jack Croscup
Subject: I've shared '100% OWNER REVIEW.PDF' with you on Box
<https://app.box.com/s/49k8zpcw71m3low0cpzegss4co7sm1>

Kori Khorsandian
Khors Construction, Inc.
(813) 728-3689

Sent from my iPhone.

SPC. Labor for Hardi-Board work
Pier 60.
Add \$22,500.00
1st Floor Alternate
Include Removal/Side/Plywood/Peel & stick/Window Installation -

From: Kori Khorsandian khorsconst@gmail.com
Subject: Fwd:
Date: October 20, 2017 at 11:23 AM
To:



Begin forwarded message:

From: "Blaisdell, Heather L" <Heather.Hartman@hdsupply.com>
Date: October 18, 2017 at 8:15:09 PM EDT
To: "khorsconst@gmail.com" <khorsconst@gmail.com>

Kori
See below

Please advise pricing and availability on what you can supply. Thank you
All Color Plus most likely dove grey.

One pallet 252 pieces 12' x 7.25" lap siding. 12.50each
17 rolls 60 mil peel and stick non stock N/A still have to get this
1620 sf hard wrap. 2 rolls @ 215.00 per roll
186LF 24" vented soffit. 36.85each

Patio Ceiling 28— 4' x 8' sheets 70.35each
133 battens. 1" x 2.5" x 12' 11.65each
Thank you
Heather


Sent from my iPhone

HD Supply Pricing for Hardi Boards
High \$\$\$

H7RICAT

6" Aperture, Remodel, ICAT
120V Line Voltage

The H7 family of recessed housings are the standard in the industry for both commercial and residential applications. The wide variety of trims available allows a number of different lighting effects to be created with one basic housing. The H7RICAT housing is designed for installations where the housing will be in direct contact with insulation, and also meet restricted air flow requirements.

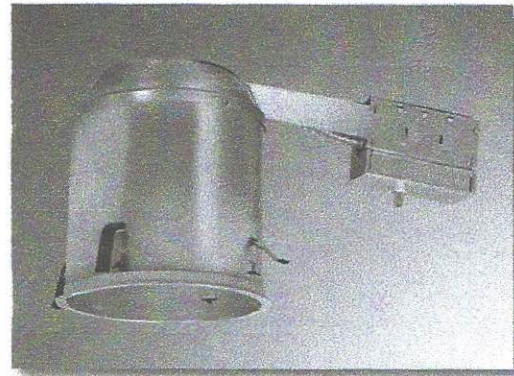

FEATURES

HOUSING

- Aluminum construction for greater heat dissipation.
- For installation from below the finished ceiling. Integral flange secures fixture against ceiling.

SOCKET PLATE

- Rigid socket plate adjusts and locks without tools for various lamp sizes.
- Socket plate and bracket may be removed when using socket supporting trims.

JUNCTION BOX

- Seven 1/2" trade size conduit knockouts with true pry-out slots are positioned to accommodate straight conduit runs.
- Four NM cable pryouts included.

"QUICK CONNECT" CONNECTORS

Three quick connect wiring connectors included.

REMODEL SPRINGS

Four remodel springs secure housing and accommodate 1/2" and 5/8" ceiling material.

SOCKET

Porcelain socket with nickel plated brass screw shell, snaps into socket plate (or into socket supporting trim for consistent lamp positioning.)

THERMAL PROTECTOR

Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping.

LABELS



- UL/cUL Listed 1598 Luminaire
- UL/cUL Damp Location Listed
- UL/cUL Listed for Wet Location, covered ceiling
- UL/cUL Listed for Feed Through
- UL/CUL Listed for direct contact with insulation and combustible material

QUALIFICATION

IC and AIR-TITE™

Certified under ASTM-E283 and listed UL/cUL 1598. May be used to meet insulated ceiling and restricted air-flow requirements such as:

- Washington State Energy Code
- International Energy Conservation Code (IECC)
- New York State Energy Conservation Construction Code (NY-ECCC)
- State of California Title 24 "Recessed Luminaires in Insulated Ceilings."

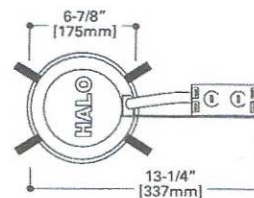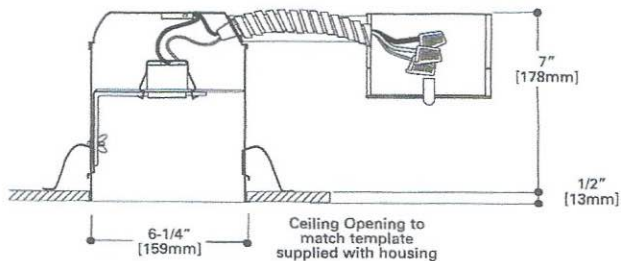

HALO®

Incandescent

Recessed Downlighting
H7RICAT




4261

Self Flange White Reflector Cone

- Accepts R and PAR lamps
- Coil Spring retention

H7ICT	
H7ICAT	45W PAR38, 50W PAR30,
H7RICT	75W R30, 75W PAR30L
H7RICAT	



Height: 2-5/8" [67mm]
Outside Diameter: 7-1/4" [184mm]



4261P
White Self Flanged Reflector Cone


30

Super Trim™ AIR-TITE Baffle



- Metal Baffle
- Self-flanged socket supporting trim with torsion spring retention
- Accepts a wide range of lamps
- Makes installation AIR-TITE regardless of housing used

H7ICT	
H7ICAT	40W A19, 65W BR30,
H7RICT	75W R30, 75W PAR30,
H7RICAT	75W PAR30L,
	65W PAR38, 90W BR40



Height: 5" [127mm]
Outside Diameter: 7-1/4" [184mm]



30WAT
White Trim with White Baffle and White Reflector

30WATH
White Trim with White Baffle and Clear Reflector

30PAT
White Trim with Black Baffle and Clear Reflector



30SNAT
Satin Nickel Trim with Satin Nickel Baffle and Reflector

30SCAT
Antique Copper Trim with Antique Copper Baffle and Reflector

30TBZAT
Tuscan Bronze Trim with Tuscan Bronze Baffle and Reflector

Halo AIR-TITE trims are designed to meet restricted airflow requirements. However local code may require a trim gasket regardless of trim design. Where required, use accessory trim gasket GA-ATRIM. Order separately in a 6 pack: GA-ATTRIM-6PK.

310


Coilex® Baffle

- Black or White Phenolic Coilex Baffle with separate metal trim ring
- Accessories available: TRM6 designer trim rings, OT403 oversize trim ring
- Coil Spring retention
- 310WG and 310PG models with separate wider metal trim ring hides ceiling irregularities and cut-out errors

H7ICT	
H7ICAT	45W PAR38,
H7RICT	50W PAR30, 65W BR30,
H7RICAT	75W R30, 75W PAR30L

310W, P, SN, AC, TBZ
Height: 3-1/16" [78mm]
Outside Diameter: 7-1/4" [184mm]


310WG, PG
Height: 3-1/16" [78mm]
Outside Diameter: 8" [203mm]



310W
White Trim with White Coilex Baffle


310P
White Trim with Black Coilex Baffle

310SN
Satin Nickel Trim with Black Coilex Baffle

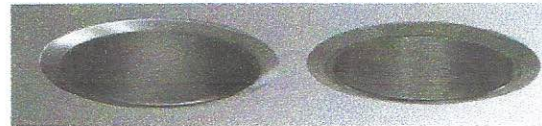


310AC
Antique Copper Trim with Black Coilex Baffle

310TBZ
Tuscan Bronze Trim with Black Coilex Baffle

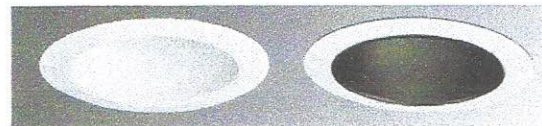


310WG
Wide White Trim Ring with White Coilex Baffle

310PG
Wide White Trim Ring with Black Coilex Baffle

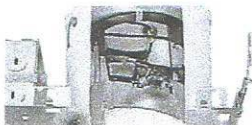

H930
R/PAR lamp aiming accessory for 310 and 426 trims.
Allows 30° tilt and 358° rotation 50W PAR30

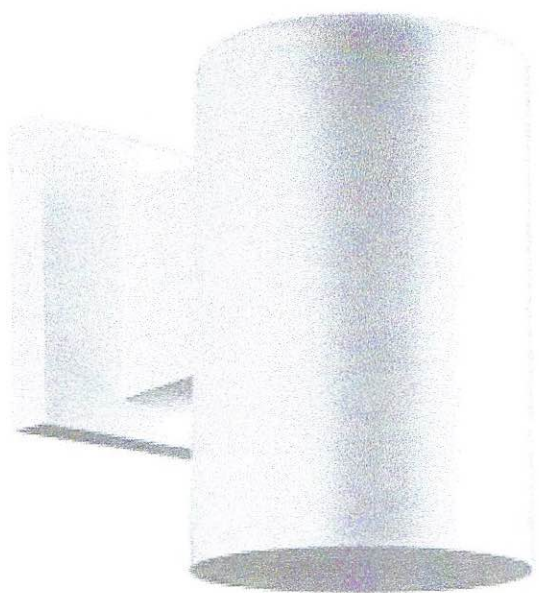

DATE: _____ TYPE: _____

NAME: _____

PROJECT: _____

Incandescent

P5712-30

Cylinder

5" non-metallic cylinder. Only non-corrosive hardware components used.
cCSAus listed for wet locations.

Category: Outdoor

Finish: White (powdercoat)

Construction: Polycarbonate construction
metal shade

Width: 5"
Height: 7-1/4"
Depth: 7-3/4"
H/CTR: 2-1/2"

MOUNTING	ELECTRICAL	LAMPING	ADDITIONAL INFORMATION
Wall mounted Mounting strap for outlet box included Back plate covers a standard 4" hexagonal recessed outlet box 4-1/2" sq.	Pre-wired 6" of wire supplied 120V	Quantity: 1 75W BR-30 Medium base ceramic socket	cCSAus Wet location listed location listed 1 year warranty Companion fixtures are available

Elite BR Series

TCP Elite Series BR Lamps are great for illuminating large areas with smooth, attractive light.



Color temperature options





CRI 82

Perfect for most applications

TCP LED

Incandescent Replacement

17W BR40	120W BR40
12W BR30/40	85W BR30 & BR40
10W BR30	65W BR30
8W R20	50W R20

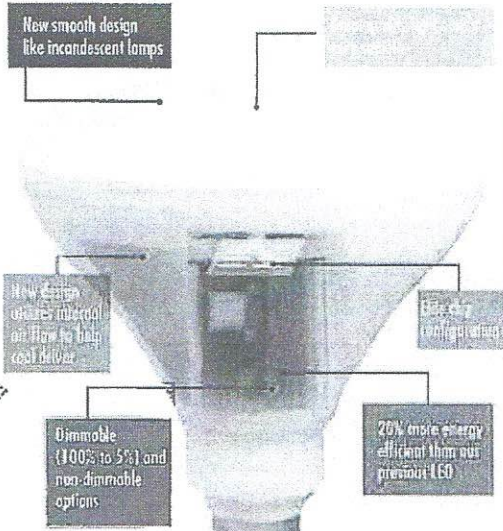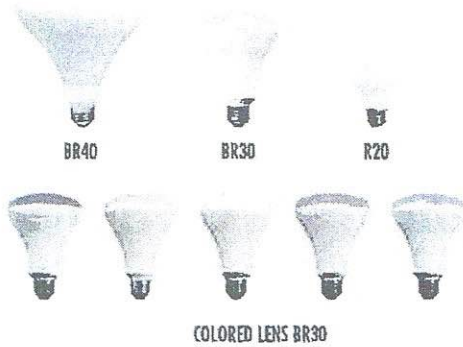

Item Number	ENERGY STAR® Item Description	Voltage	Lamp Watts	Lumens	Lumens Per Watt	Beam Angle	COI	CRI	STK/MTD	Case Quantity	Dimmable Elite LED BR Lamps
12W Elite Dimmable BR30 (Replaces 85W) - Colored Lens											
LED12BR30DB	Dimmable 12W Elite BR30 Red Lens	120	12	850	70.8	110	-	82	5TK	12	
LED12BR30DAMB	Dimmable 12W Elite BR30 Amber Lens	120	12	850	70.8	110	-	82	5TK	12	
LED12BR30DY	Dimmable 12W Elite BR30 Yellow Lens	120	12	850	70.8	110	-	82	5TK	12	
LED12BR30DBL	Dimmable 12W Elite BR30 Blue Lens	120	12	850	70.8	110	-	82	5TK	12	
LED12BR30DGR	Dimmable 12W Elite BR30 Green Lens	120	12	850	70.8	110	-	82	5TK	12	

★ ENERGY STAR® Rated (at time of print)



*Based on 12 hours per day

TCP LED CHINA LOG
800.324.1496 | tcp.com



CUSTOMER COPY
QUOTATION #77734

Date Entered: 11/10/2017
Date Printed: 11/10/2017
Printed By: David Levines

SOLD TO:
Lansing BP Tampa
4501 Transport DrBld 5


Tampa , FL 33605
Phone: 813-963-7033Fax: 813-549-3901

SHIP TO:
Lansing BP Tampa
4501 Transport DrBld 5

Tampa , FL 33605
Phone: 813-963-7033Fax: 813-549-3901



PO NUMBER	QUOTE NAME	PROJECT NAME
	Pier 60	Kohrs Construction

LineItem #	Qty.	Long Description	Unit Price	Ext. Price
100-1	4	StormBreaker Plus Windows Double Hung	\$805.29	\$3,221.16
RO:		Operating / Operating 46.75 X 46		
47.25" X 46.5"		Operation = Operating / Operating		
Room ID:		Frame = Integral Masonry Flange		
N/A		Frame Modification = None		
		Ext. Color = White, Int. Color = White		
		Glass Package = Standard Glass Options		
		ProSolar Shade Low E, Argon, Intercept, 1" IGU		
		Glass Thickness = 1/8 in - 1/8 out		
		Upper = Annealed		
		Lower = Annealed		
		Locks = 2, White, Cam		
		Air Latches = None		
		Head Expander = Yes		
		Screen = Half, Fiberglass, Extruded		
		Vertical, Factory, 0.5" thick, 46" length		
		Unit 1: U-Factor = 0.29		
		Unit 2: U-Factor = 0.29, Unit 1: SHGC = 0.2		
		Unit 2: SHGC = 0.2, Unit 1: VT = 0.45		
		Unit 2: VT = 0.45, Unit 1: STC = 36		
		Unit 2: STC = 36		
		DP = 65		
		DP DP Calculated Overall Rating = 65		
		TDI = WIN-271		
		Florida Approval Code = 5419		

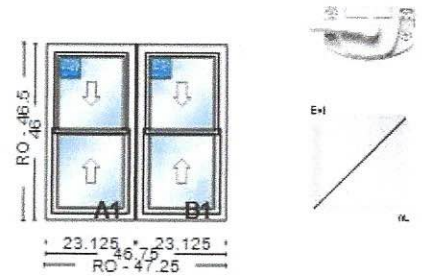



Initials: _____

LineItem #	Qty.	Long Description	Unit Price	Ext. Price
200-1	3	StormBreaker Plus Windows Double Slider Left	\$589.21	\$1,767.63
RO:		Opening - XO 47.5 X 46		
48" X 46.5"		Operation = Left Opening - XO		
Room ID:		Frame = Integral Masonry Flange		
N/A		Frame Modification = None		
		Ext. Color = White, Int. Color = White		
		Glass Package = Standard Glass Options		
		NoneProSolar Shade Low E, Argon, Intercept, 1" IGU		
		Glass Thickness = 1/8 in - 1/8 out		
		Left = Annealed		
		Right = Annealed		
		Locks = 2, White, Cam		
		Air Latches = None		
		Rollers = Corrosion Resistant		
		Screen = Half, Fiberglass, Extruded		
		U-Factor = 0.29, SHGC = 0.19, VT = 0.43, STC = 33		
		DP = 50		
		DP DP Calculated Overall Rating = 50		
		TDI = WIN-1021		
		Florida Approval Code = 10160		




Initials: _____

LineItem #	Qty.	Long Description	Unit Price	Ext. Price
300-1	2	SPSMLW Semi Mull-Large;WH Length: 46 FOOT	\$8.87	\$17.74





LineItem #	Qty.	Long Description	Unit Price	Ext. Price
400-1	2	StormBreaker Plus Windows Double Hung Operating / Operating / Operating 71.75 X 46 Operation = Operating / Operating / Operating Frame = Integral Masonry Flange Frame Modification = None Ext. Color = White, Int. Color = White Glass Package = Standard Glass Options ProSolar Shade Low E, Argon, Intercept, 1" IGU Glass Thickness = 1/8 in - 1/8 out Upper = Annealed Lower = Annealed Locks = 2, White, Cam Air Latches = None Head Expander = Yes Screen = Half, Fiberglass, Extruded Vertical, Factory, 0.5" thick, 46" length Unit 1: U-Factor = 0.29 Unit 2: U-Factor = 0.29 Unit 3: U-Factor = 0.29, Unit 1: SHGC = 0.2 Unit 2: SHGC = 0.2 Unit 3: SHGC = 0.2, Unit 1: VT = 0.45 Unit 2: VT = 0.45 Unit 3: VT = 0.45, Unit 1: STC = 36 Unit 2: STC = 36 Unit 3: STC = 36 DP = 65 DP DP Calculated Overall Rating = 65 TDI = WIN-271 Florida Approval Code = 5419	\$1,233.69	\$2,467.38




Initials: _____

LineItem #	Qty.	Long Description	Unit Price	Ext. Price
500-1	1	SPSMLW Semi Mull-Large;WH Length: 46 FOOT	\$8.87	\$8.87



LineItem #	Qty.	Long Description	Unit Price	Ext. Price
600-1	1	StormBreaker Plus Windows Direct Set Fixed 36 X 36	\$762.59	\$762.59
RO:		Operation = Fixed		
36" X 36"		Frame = Integral Masonry Flange		
Room ID:		Frame Modification = None		
N/A		Ext. Color = White, Int. Color = White		
		Glass Package = Standard Glass Options		
		NoneProSolar Shade Low E, Argon, Super Spacer, 1" IGU		
		Glass Thickness = 1/8 in - 1/8 out		
		Tempered Inside Only		
		Grille Pattern = Colonial		
		Grille App = 5/8" Flat, White		
		DLO = 2W2H		
		U-Factor = 0.25, SHGC = 0.2, VT = 0.44, STC = 35		
		DP = 55		
		DP DP Calculated Overall Rating = 55		
		TDI = WIN-1192		
		Florida Approval Code = 228		

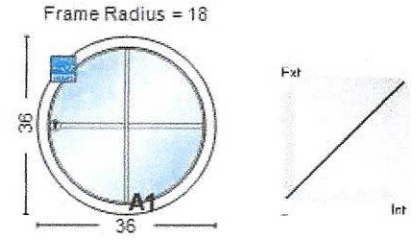

Initials: _____

10 Total Qty Units

SUB-TOTAL: \$8,245.37

Comment:

TOTAL TAX: \$577.18

TOTAL LABOR: \$0.00

TOTAL FREIGHT: \$0.00

DIST/DLR DISC: (\$0.00)

TOTAL: \$8,822.54

DEPOSIT PAID: (\$0.00)

AMOUNT DUE: \$8822.54

Submitted by: _____ Accepted by: _____ Date _____

PROPOSAL

<p style="text-align: center;">JEFFCO CONSTRUCTION INC STUCCO / STONE / BANDS PO BOX 809 DOVER, FL 33527 PHONE 813-986-6360 FAX 813-986-1593 WEBSITE: www.jeffcostucco.com Email: jeff_jeffco@yahoo.com PROVIDING QUALITY WORK AT A FAIR PRICE</p>	<p style="text-align: center;">PROPOSAL NO: 2017-KCI-004</p> <p style="text-align: center;">DATE: November 10, 2017</p>
PROPOSED TO	JOB INFO
NAME: KHORS CONSTRUCTION INC STREET: 12222 ANNE KENIA DR CITY/STATE/ZIP: THONOTOSASSA, FL 33592 PHONE: 813-924-0845 FAX/EMAIL: ATTN: KORI – 81-728-3689	JOB NAME: Pier 60 Columns
<p>MATERIALS & LABOR INCLUDED;</p> <ul style="list-style-type: none"> SAND FINISH OVER 40 EXISITNG COLUMNS SYNTHETIC FINISH COLOR STUCCO SAND FINISH (COLOR CHOSEN BY OWNER) <p>All Material is guaranteed to be specified, and the above to be performed in accordance with the drawings and specifications submitted for above work and completed in a substantial workmanlike Sum of \$10,400.00</p> <p>TEN THOUSAND FOUR HUNDRED AND 00/00</p> <p>With payments to be made as follows: UPON COMPLETION</p> <p>Any alteration or deviation from above specifications involving extra cost, will be executed only upon written orders, and will become an extra charge over and above the estimate. All agreements contingent upon strikes, accidents or delays beyond our control. Owner to carry fire, tornado, and other necessary insurance upon above work. Workman's Compensation and Public Liability Insurance on above work to be taken out by JeffCo Construction Inc.</p> <p>~ NOTE – THIS PROPOSAL MAY BE WITHDRAWN BY US IF NOT ACCEPTED IN 15 DAYS.</p> <p style="text-align: center;">Respectfully Submitted <i>Jeff Tomlinson</i></p> <p style="text-align: center;">Thank You, We Appreciate Your Business</p> <p>I ACCPET THIS PROPOSAL _____</p> <p>By signing you are agreeing to all terms and conditions as stated in the entire proposal.</p>	